


WATER TREATMENT


EQUIPMENT – DOSING UNITS

DEMINERALISERS

- Gives the possibility to produce high quality flushing water for tank cleaning
- Periodic capacities from 31 m³ based on supply of 15 PPM for the Aquastill 39 up to 120m³ with supply of 15 PPM for the HOC 50
- Saves ship owners on water costs and gives continuous flush water quality
- Aquastill 39 is also available with stainless steel connections

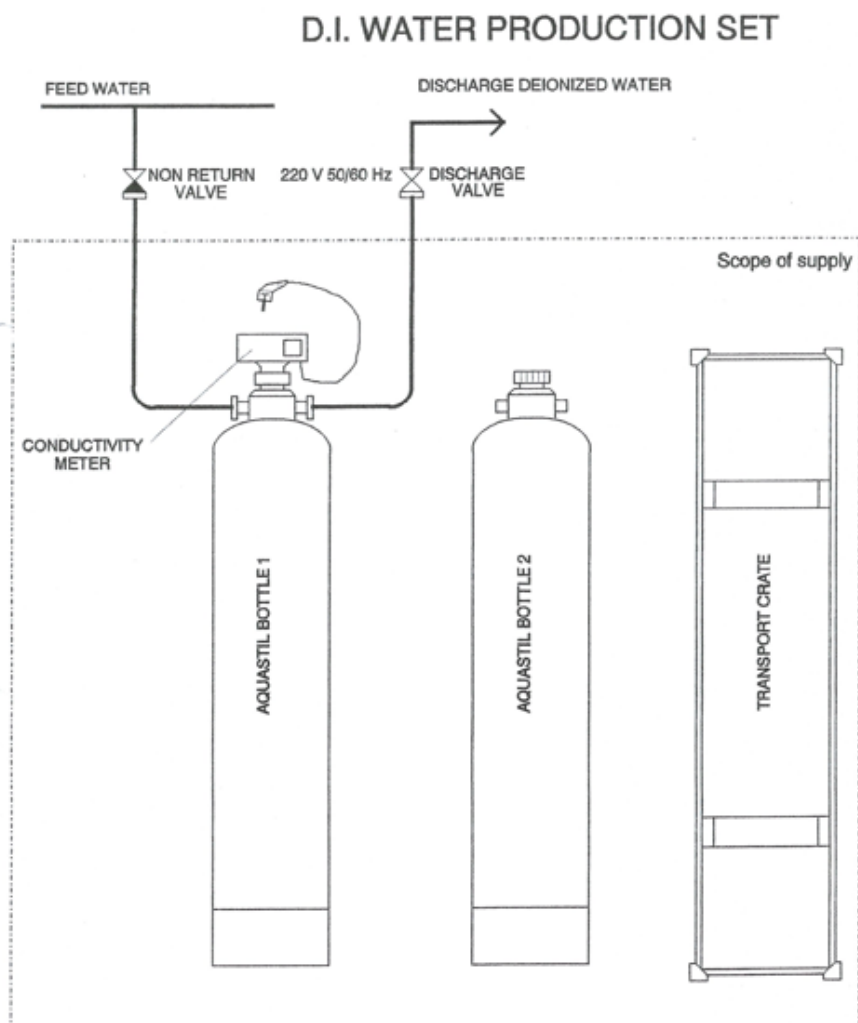

HDC 50 MIXED-BED DEMINERALIZER

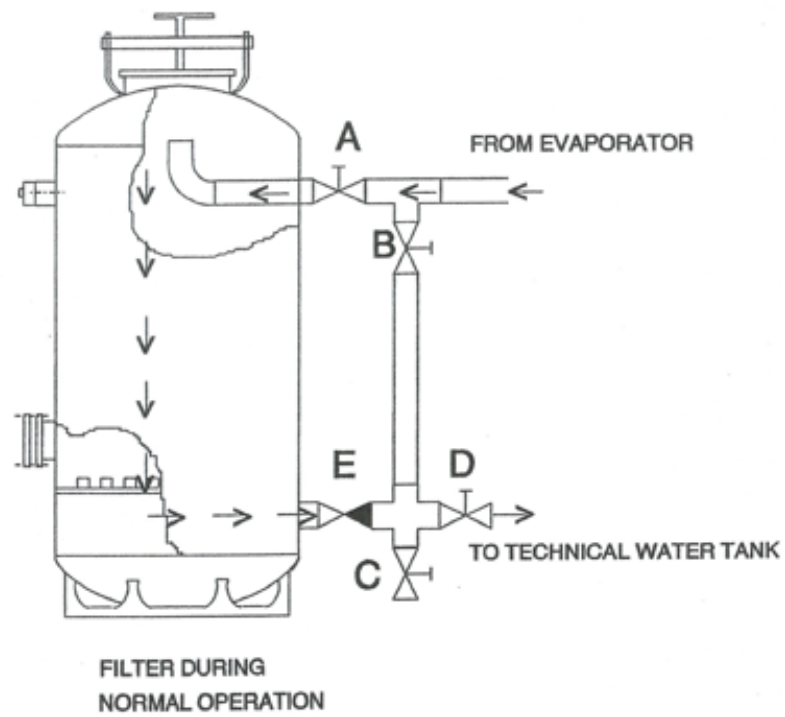

- A INLET BALL VALVE 3/4"
- B DRAIN AND BY-PASS BALL VALVE INLET LINE FROM EVAPORATOR (FROST PROTECTION)
- C DRAIN BALL VALVE FILTER 3/4", WITH HOSE CONNECTION 20 mm
- D OUTLET BALL VALVE 3/4"
- E NON RETURN VALVE 3/4"

